

SERIE
DSP
ek

lamber[®]
DSP5-ek

Pass-through
dishwasher



HOST 2015
**SMART
LABEL**
>>>

Lamber got the **SMART LABEL** 2015 award for technological innovation

**THINKING
THE FUTURE**

**DESIGNING
THE PRESENT**

DESIGNED FOR HIGH PERFORMANCE.

We design dishwashers since many years, always with the idea of creating a quality and durability product. A dishwasher that lasts many years respects the environment because it does not consume other renewable sources.

The new DSP5-EK pass-through dishwashers guarantee outstanding reliability of results and low maintenance costs.

Suitable for even intensive work cycles and different types of dishes, they guarantee high economy of operation.



SPECIFICATIONS

- Stainless steel constructions 18/10 AISI 304;
- Soft-touch electronic control panel;
- Wash cycle: Standard 1'-2'-3' / 2'-3'-4' minutes + endless cycle;
- Washing and rinsing temperature display;
- Rotating upper rinsing
- Constante rinse boiler system (RCB);
- Rinse-aid dispenser;
- Tank self-washing;
- Thermocontrol (device wich guarantees the selected temperature for every rinsing cycle)
- Cycle start with soft-start system;
- Hood opening safety device;
- Integral tank drawer filters in plastic (OPTION);
- Automatic tank loading;
- Easy maintenance.



The lower and upper washing and rinsing arms are easily detachable and guarantees an effective cleaning results.

DSP5-ek



Unique design and attention to detail define cutting-edge design of Lamber team.

The focus of innovation, product quality and robustness of components are the strengths of our environmental sustainability.

Temperature display

Soft-touch electronic control panel with washing and rinsing temperature display.


BUILT TO BE RESISTANT.

In order to guarantee excellent results, it is necessary to use **high quality and strong materials**.

The use of stainless steel for the most stressed and important components of your dishwasher guarantees the **maximum reliability** to our products.

Intense and pressing pace of work will not be a problem for your dishwasher and results of maximum **efficiency and hygiene** will be assured.

Stainless Steel nozzles designed to guarantee the best washing efficacy.

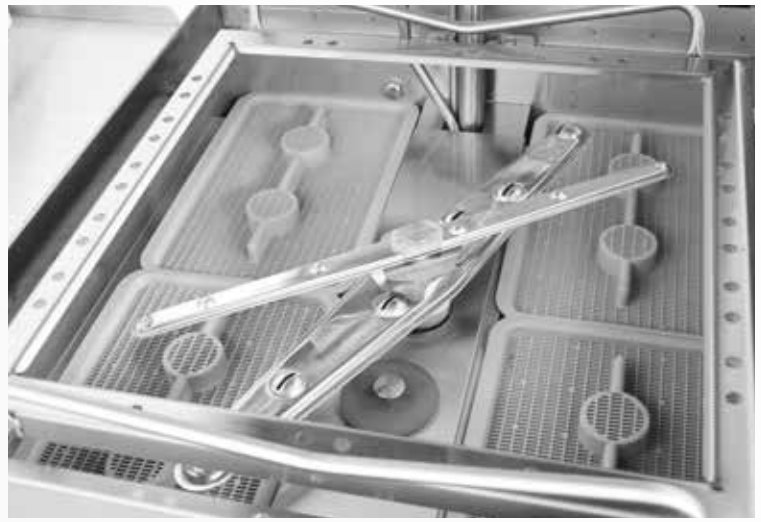

The rack slide is detachable and so it allows an easy cleaning of the wash tank.

The extractable tan filters (OPTIONAL) are made of fire retardant plastic.

A wide range of lockers are available to enable you to wash all types of dishes in the most appropriate way.



General basket included.





CPV - CC00064 (optional)
Basket for Gastronorm and Euronorm trays.



CPP - CC00034 (optional)
Basket for PIZZA dishes ø300 mm.

Accessories

- 1 basket for 12÷18 dishes in plastic
- 1 General basket in plastic
- 1 Cutlery container in plastic

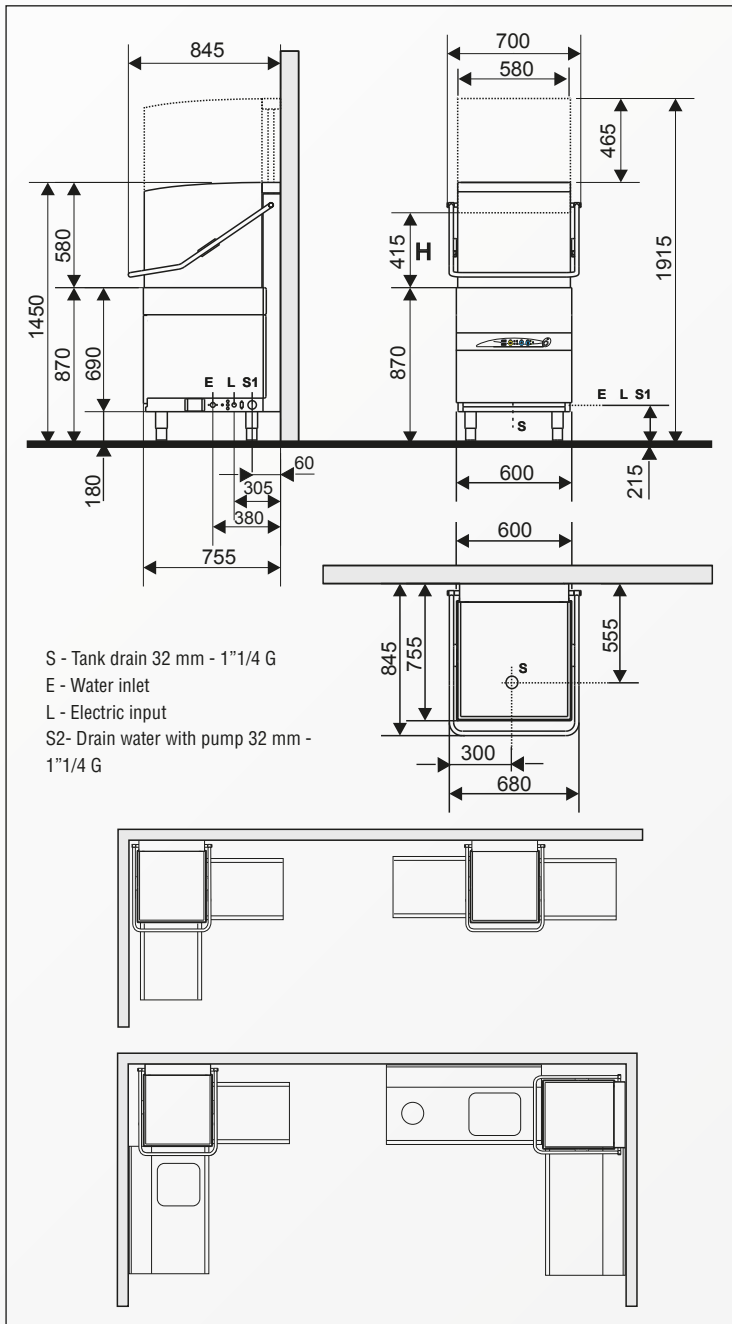

DSP5-ek

Optional

PL Cod. AC00135	Lateral entry/exit table edge 40 mm with lower table	
PSL Cod. AC00068	Entry or exit lifted side shelf with lower space for baskets edge 40 mm	
PLV Cod. AC00025	Pre-washing table, right or left with one tank 400x400xh200 mm with splash shield and lower table	
PLVS Cod. AC00127	Pre-washing table, right or left with one tank 400x400xh200 mm with splash shield, lower table & hole for waste exhaust	
Cod. 0800755	Special «save place» handle in S.S.	
Cod. 0400367	Basket support for corner slide	
Cod. AC00128	Integral tank filters in fire retardant plastic	

Washing systems design

Our expert technical staff can provide the best solutions to organize your washing areas. Lay-out studies and 3D views will help you in the design of your washing areas, always considering your personal requirements.

Specifications	D	P		
	Washing detergent dispenser	Drain pump		
	Pass-through dishwasher			
	DSP5-ek			
	DSP5-ek-D	●		
DSP5-ek-P		○		
DSP5-ek-D-P	●	○		
DIMENSIONS LxDxH	600 x 755 x 1.450		mm	
WASHING CAPACITY dishes/hour	540/360/270 1.080/540/360		Nr. Nr.	
WASHING CAPACITY baskets/hour	30-20-15 / 60-30-20		Nr.	
WASH CYCLE standard	2-3-4 / 1-2-3		min	
ENDLESS CYCLE (standard -ek- version)	∞			
BASKET DIMENSION	500 x 500		mm	
DISHES PER BASKETS	12÷18		Nr.	
WORK HEIGHT	870		mm	
CLEARANCE	415		mm	
VOLTAGE	430 V-3N - 50Hz		V	
WASHING PUMP	650		W	
WASH TANK ELEMENTS	2.400		W	
RINSE TANK ELEMENTS	6.000		W	
TOTAL RATING	6.650		W	
MAX. CURRENT INTENSITY	10		A	
TANK CAPACITY	39		Lt	
BOILER CAPACITY	5		Lt	
RINSE AID DISPENSER	SI			
HOT WATER CONNECTION	45÷55		°C	
CYCLE WATER CONSUMPTION	2,60		Lt	
WATER PRESSURE	2÷4		Bar	
RINSE WATER TEMPERATURE	80÷90		°C	
WATER INLET	3/4		°G	
WATER OUTLET	32 mm/1"1/4		°G	
NET WEIGHT	111		Kg	
GROSS WEIGHT	121		Kg	
NOISE	<54		dB(A)	



4 standard models
with optional Drain pump
and Detergent pump.

D Detergent pump

The incorporated washing liquid detergent dispenser automatically adjust the amount of detergent.

P Incorporated drain pump

The incorporated drain pump automatically empties the washing tank.

QR CODE to stay up to date easily and quickly

Each dishwasher has QR codes which allow you to quickly download all information you will need about your product.

An important tool, both for the end user, who can consult the user manual, and for the specialist, who can access technical material.



- www.lamber.it

The manufacturer reserves the right to make modifications of materials and models without warning.



Via Italia, 6 - 26855 Lodi Vecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.it - e-mail: info@lamber.it

CE